



〔12〕发明专利申请公开说明书

〔21〕 申请号 90108775.0

〔51〕 Int.Cl⁵

A61B 5/14

〔43〕 公开日 1991年5月15日

〔22〕申请日 90.10.27

〔30〕优先权

〔32〕89.10.28 〔33〕KR 〔31〕15584 / 89

〔32〕90.7.24 〔33〕KR 〔31〕11241 / 90

〔71〕申请人 梁元锡

地址 南朝鲜汉城特别市

共同申请人 金允玉

〔72〕发明人 梁元锡 金允玉

〔74〕专利代理机构 中国专利代理有限公司

代理人 吴增勇 吴秉芬


G01N 33/66

说明书页数：6 附图页数：2

〔54〕发明名称 无创测量血糖浓度的方法和装置

〔57〕摘要

无创测量血糖浓度的方法和装置。本发明使来自半导体二极管激光器的波长为1.3-1.9微米的电磁辐射线，通过皮肤传到血管。在那里光与血液中的不均匀成分相互作用，然后由血液漫反射。被反射的光将为血液主要成分的分子的特性振动所调制。该反射光被检测并以数字信号提供给单片微计算机。该单片微计算机根据该数字信号并参照储存在其存储器中的一条标定曲线算出血糖浓度。然后将该浓度值显示在数字显示器上。

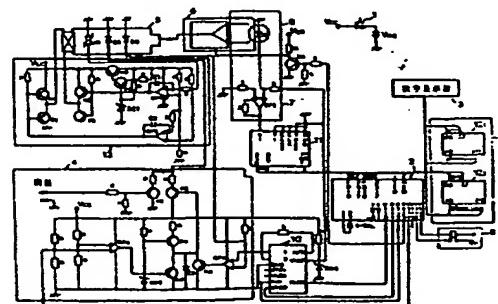


^ v

(BJ)第1456号

A method and apparatus for measuring blood glucose concentration by irradiating blood vessels with electromagnetic radiation using near-infrared radiation diffuse-reflection laser spectroscopy. This invention uses electromagnetic radiation of a wavelength that is transmitted through the skin to the measurement part, for example, a blood vessel. Since skin is mostly composed of water (H_2O), which absorbs IR radiation in nearly the entire IR spectral range, only radiation of a certain, narrow portion of the IR spectral range called the "water transmission window" is transmitted through the skin. The present invention uses electromagnetic radiation with a wavelength of 1.3 μm SIMILAR 1.9 μm radiation from a semiconductor diode laser (5). When electromagnetic radiation of these wavelengths irradiates the skin, light is transmitted through the skin to the blood vessel where the light interacts with the heterogeneous components of the blood. The light which reaches the blood is then diffusely reflected by the blood. The reflected light will have been modulated by the characteristic vibrations of the molecules which are major components of blood. The reflected light is detected and provided as a digital signal to a one-chip microcomputer (2). The one-chip microcomputer (2) calculates a blood glucose concentration from the digital signal by reference to a calibration curve stored in the memory of the one-chip microcomputer (2). The one-chip microcomputer (2) causes the calculated blood glucose concentration to be displayed on a

FIG.1.

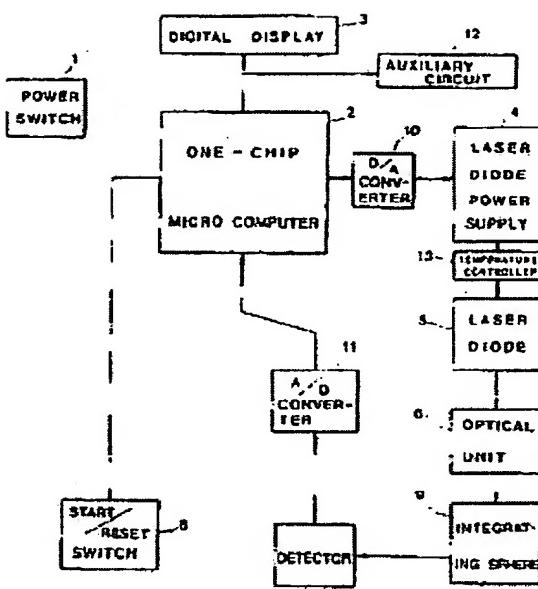

digital display (3).

Data supplied from the **esp@cenet** database - Worldwide

BEST AVAILABLE COPY

Non-invasive method and apparatus for measuring blood glucose concentration

Bibliographic data	Description	Claims	Mosaics	Original document	INPADOC legal status
Patent number:	US5267152				
Publication date:	1993-11-30				
Inventor:	YANG WON S [KRI]; KIM YOON O [KRI]				
Applicant:	YANG WON S [KRI]; KIM YOON O [KRI]				
Classification:	G06F 15/42				
International:	A61B 5/00R4				
European:	US19900604800 19901026				
Application number:	KR19890015584 19891028 KR19900011241 19900724				
Priority number(s):					
View INPADOC patent family					

Abstract not available for US5267152

Abstract of corresponding document: EP0426358

Also published as:

- EP0426358 (A1)
- JP3146032 (A)
- EP0426358 (B1)
- RU2122208 (C1)
- HU213438 (B)

BEST AVAILABLE COPY